

Measuring and Ordering Double Hung Sash -

Note: All double hung replacement sashes are provided with glass.

What you will need:



Tape measure




Paper and writing instrument
OR print out this sheet

1. First. Determine the type of Double Hung window you are replacing.



Wood

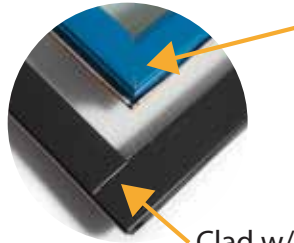

Clad w/ Miter Joint



NOTE: If the corner is a miter cut please contact us for availability. A sash with a miter joint **CAN NOT** be ordered on line.

Clad w/ Butt Joint



2. Second. Measuring the window.


When ordering you will be asked to choose either top sash or bottom sash.

Measure the daylight opening of the sash unit(s), this is the opening that would be cleaned when you are cleaning the class.

Do not measure the outside of the window, only the opening that receives daylight. This area is highlighted in green in the illustration.

Top Sash

Bottom Sash

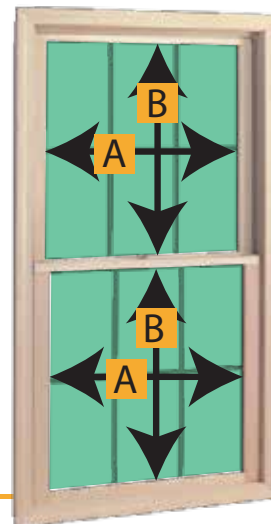

Daylight opening shown in green

A= Width
B= Height

3. Third. Provide us the info!

PRODUCT:

- Wood Double Hung Sash with Standard glass
- Wood Double Hung Sash with Low-e glass
- Clad Double Hung Sash with Standard glass
- Clad Double Hung Sash with Low-e glass

SIZE (from step 2 above):

Top Sash: A=____ X B=____

Bottom Sash: A=____ X B=____

CLAD COLOR (if applicable):

White Bronze Sandstone

Other-Call for price